

เครื่องพันพาเลท

ROBOT EXP-630



STANDARD SPECIFICATION



MMP CORPORATION LTD.
บริษัท เอ็มเอ็มพี คอร์ปอเรชั่น จำกัด

3075/1-2 ถนนสุขุมวิท บางจาก พระโขนง กรุงเทพฯ 10260 โทร. 02-741-8444
3075/1-2 SUKHUMVIT ROAD, BANGJAK, PRAKANONG, BANGKOK 10260 FAX : (662) 332-0514

www.mmpcorp.co.th

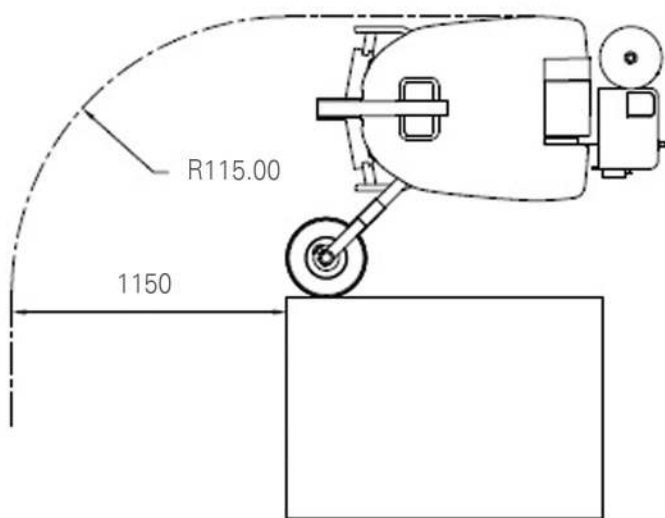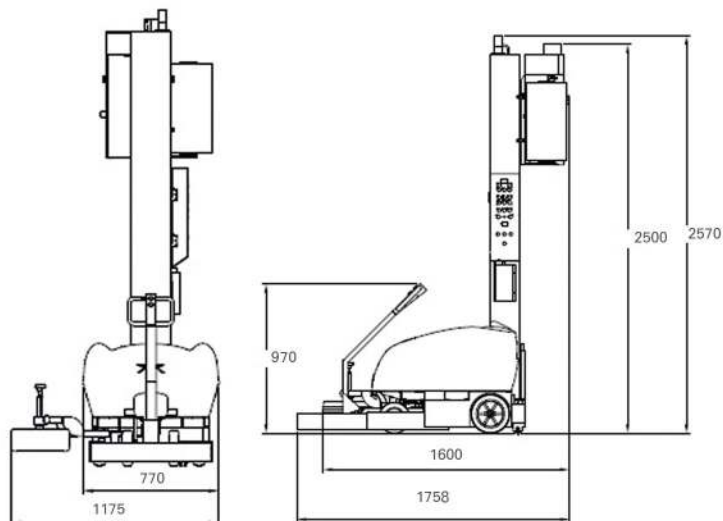

STANDARD SPECIFICATION

BATTERIES	: TWO 12V 100Ah NON-MAINTENANCE TYPE BATTERIES
BATTERY CHARGER	: 110V ~ 240V
POWER CONSUMPTION	: 0.7KW
CART ROTATING SPEED	: 20 ~ 90M/ MIN
CARRIAGE SPEED	: 1 ~ 5M/MIN
MAX. LOADING WEIGHT	: FLOOR CAPACITY
MIN. PALLET SIZE	: 600MM (L) X 600MM (W)
MAX. WRAPPING HEIGHT	: 2200MM
NUMBERS OF PALLETS PER BATTERY CHARGE	: UP TO 300 PALLETS

MAJOR FEATURES

- 230% & 300% POWER PRE-STRETCH (1M -> 4M)
- AVAILABLE 200% & 250% POWER PRE-STRETCH
- EASY FILM TREADING DESIGN
- AUTOMATIC FILM CUTTING
- ADJUSTABLE TOP AND BOTTOM WRAP COUNTS
- ADJUSTABLE WRAPPING TENSION/CART ROTATION
SPEED/CARRIAGE SPEED
- PASSWORD PROTECTED CONTROL PANEL
- HEIGHT DETECTION BY PHOTO SENSOR
- ONE-WAY IDLE ROLLER DESIGN TO ALLOW FILM TAIL TO STAY
OUTSIDE OF CARRIAGE WHEN FILM BREAKS
- CARRIAGE ANTI-FALLING DEVICE



EASY THREAD



AUTOMATIC FILM CUTTING